



MAXIMUM CAPACITIES

RAMPING

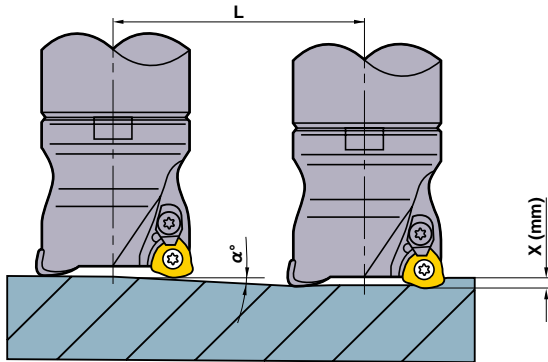

HELICAL CUTTING



- How to derive a locus of the centre of the tool.

$$\varnothing dc = \varnothing DH - \varnothing D1$$

Locus of the centre of the tool Desired hole diameter Cutting edge diameter
- Please set the depth of cut per cycle under max. depth of cut (ap).
- Please machine in a down cutting direction (climb milling).

- When ramping and helical cutting, please apply a lower feed (60% of the calculated feed rate or less).
- When drilling, please set the feed in the axial direction at 0.2mm/rev or less.

Order Number	Tool Diameter (mm)	Machined Face Diameter (mm)	Max. Depth of Cut ap (mm)	Ramp Machining				Helical Cutting		Max. Drilling Depth A2 (mm)	
				Max. Angle	Required Distance for X Depth L (mm)			Min. Hole Diameter DH (mm)	Max. Hole Diameter DH (mm)		
					X=1	X=1.5	X=2				
Shank type / Screw-in type	AJX06R162	16	8	1.0	3°	19.1	—	—	23	29	0.3
	06R172	17	9	1.0	2°30'	22.9	—	—	25	31	0.3
	06R203	20	12	1.0	1°30'	38.2	—	—	31	37	0.3
	06R223	22	14	1.0	1°	57.3	—	—	35	41	0.3
	08R202	20	11	1.5	3°30'	16.3	24.5	—	27	36	0.5
	08R222	22	13	1.5	3°	19.1	28.6	—	31	40	0.5
	08R253	25	16	1.5	2°	28.6	43.0	—	37	46	0.5
	08R283	28	19	1.5	1°42'	33.7	50.5	—	43	52	0.5
	09R252	25	14	2.0	4°	14.3	21.5	28.6	33	46	1.0
	09R282	28	17	2.0	3°	19.1	28.6	38.1	39	52	1.0
	09R303	30	19	2.0	2°42'	21.2	31.8	42.4	43	56	1.0
	09R323	32	21	2.0	2°30'	22.9	34.4	45.8	47	60	1.0
	09R353	35	24	2.0	2°	28.6	43.0	57.3	53	66	1.0
	09R404	40	29	2.0	1°30'	38.2	57.3	76.4	63	76	1.0
	12R302	30	18	2.0	4°30'	12.7	19.0	25.4	39	56	1.5
	12R322	32	20	2.0	4°	14.3	21.4	28.6	41	60	1.5
	12R352	35	23	2.0	3°30'	16.3	24.5	32.7	47	66	1.5
	12R402	40	28	2.0	3°	19.1	28.6	38.2	57	76	1.5
12R403	40	28	2.0	3°	19.1	28.6	38.2	57	76	1.5	
14R503	50	38	2.0	4°12'	13.6	20.4	27.2	72	96	2.0	
14R634	63	51	2.0	2°48'	20.4	30.7	40.9	98	122	2.0	
Arbor type	AJX09-050	50	40	2.0	1°06'	52.1	78.1	104.2	83	96	1.0
	09-052	52	41	2.0	1°	57.3	85.9	114.6	87	100	1.0
	AJX12-050	50	38	2.0	2°	28.6	43.0	57.3	77	96	1.5
	R050	50	38	2.0	2°	28.6	43.0	57.3	77	96	1.5
	-052	52	40	2.0	1°48'	31.8	47.7	63.6	81	100	1.5
	-063	63	51	2.0	1°30'	38.2	57.3	76.4	103	122	1.5
	-066	66	54	2.0	1°24'	40.9	61.4	81.8	109	128	1.5
	-080	80	68	2.0	1°06'	52.1	78.1	104.2	137	156	1.5
	-100	100	88	2.0	0°48'	71.6	107.4	143.2	177	196	1.5
	AJX14-063	63	51	2.0	2°48'	20.4	30.7	40.9	98	122	2.0
	R063	63	51	2.0	2°48'	20.4	30.7	40.9	98	122	2.0
	-066	66	54	2.0	2°30'	22.9	34.4	45.8	105	128	2.0
	R080	80	68	2.0	1°48'	31.8	47.7	63.6	132	156	2.0
	R100	100	88	2.0	1°12'	47.7	71.6	95.5	172	196	2.0
	R125	125	113	2.0	0°48'	71.6	107.4	143.2	222	246	2.0
	R160	160	148	2.0	0°30'	114.6	171.9	229.2	292	316	2.0


RECOMMENDED CUTTING CONDITIONS

Work Material	Hardness	Grade	Cutting Speed (m/min)	φ 16 - 17			φ 20 - 22			φ 25 - 28		
				Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)
P	Mild Steel	FH7020	170 (120–220)	140	0.8	0.8	160	1.0	1.0	170	1.0	1.2
				180	0.8	0.6	210	0.8	0.8	230	0.8	1.0
				210	0.4	0.4	240	0.6	0.6	290	0.6	0.8
		MP6120	150 (100–200)	140	0.8	0.8	160	1.0	1.0	170	1.0	1.2
				180	0.8	0.6	210	0.8	0.8	230	0.8	1.0
				210	0.4	0.4	240	0.6	0.6	290	0.6	0.8
		FH6130	130 (80–180)	140	0.8	0.8	160	1.0	1.0	170	1.0	1.2
				180	0.8	0.6	210	0.8	0.8	230	0.8	1.0
				210	0.4	0.4	240	0.6	0.6	290	0.6	0.8
		VP30RT	110 (60–160)	140	0.8	0.8	160	1.0	1.0	170	1.0	1.2
				180	0.8	0.6	210	0.8	0.8	230	0.8	1.0
				210	0.4	0.4	240	0.6	0.6	290	0.6	0.8
Carbon Steel Alloy Steel	180–280HB	FH7020	150 (100–200)	140	0.8	0.8	160	1.0	1.0	170	1.0	1.2
				180	0.8	0.6	210	0.8	0.8	230	0.8	1.0
				210	0.4	0.4	240	0.6	0.6	290	0.6	0.8
		MP6120	130 (80–180)	140	0.8	0.8	160	1.0	1.0	170	1.0	1.2
				180	0.8	0.6	210	0.8	0.8	230	0.8	1.0
				210	0.4	0.4	240	0.6	0.6	290	0.6	0.8
		FH6130	110 (60–160)	140	0.8	0.8	160	1.0	1.0	170	1.0	1.2
				180	0.8	0.6	210	0.8	0.8	230	0.8	1.0
				210	0.4	0.4	240	0.6	0.6	290	0.6	0.8
		VP30RT	90 (40–140)	140	0.8	0.8	160	1.0	1.0	170	1.0	1.2
				180	0.8	0.6	210	0.8	0.8	230	0.8	1.0
				210	0.4	0.4	240	0.6	0.6	290	0.6	0.8
Carbon Steel Alloy Steel	280–350HB	FH7020	130 (80–180)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
				180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
				210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
		MP6120	100 (50–150)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
				180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
				210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
		FH6130	80 (30–130)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
				180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
				210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
		VP30RT	60 (20–110)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
				180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
				210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
Alloy Tool Steel	≤350HB	FH7020	130 (80–180)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
				180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
				210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
		MP6120	100 (50–150)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
				180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
				210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
		FH6130	80 (30–120)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
				180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
				210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
		VP30RT	60 (20–90)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
				180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
				210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
Pre-hardened Steel	35–45HRC	MP6120	100 (70–130)	140	0.7	0.7	160	0.8	0.8	170	0.8	1.0
				180	0.5	0.5	210	0.6	0.6	230	0.6	0.8
				210	0.3	0.3	240	0.4	0.4	290	0.4	0.6
		FH6130	80 (50–110)	140	0.7	0.7	160	0.8	0.8	170	0.8	1.0
				180	0.5	0.5	210	0.6	0.6	230	0.6	0.8
				210	0.3	0.3	240	0.4	0.4	290	0.4	0.6
		VP30RT	80 (30–90)	140	0.7	0.7	160	0.8	0.8	170	0.8	1.0
				180	0.5	0.5	210	0.6	0.6	230	0.6	0.8
				210	0.3	0.3	240	0.4	0.4	290	0.4	0.6

RECOMMENDED CUTTING CONDITIONS

Work Material	Hardness	Grade	Cutting Speed (m/min)	φ16 - 17			φ20 - 22			φ25 - 28			
				Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	
M Stainless Steel	≤200HB	MP7130	140 (100-180)	140	0.8	0.7	160	1.0	0.8	170	1.0	1.0	
				180	0.6	0.5	210	0.8	0.6	230	0.8	0.8	
				210	0.4	0.3	240	0.6	0.4	290	0.6	0.6	
		MP7140	120 (80-160)	140	0.8	0.7	160	1.0	0.8	170	1.0	1.0	
				180	0.6	0.5	210	0.8	0.6	230	0.8	0.8	
				210	0.4	0.3	240	0.6	0.4	290	0.6	0.6	
K Gray Cast Iron	≤200HB	FH7020	150 (100-200)	140	0.8	1.0	160	1.0	1.2	170	1.0	1.4	
				180	0.6	0.8	210	0.8	1.0	230	0.8	1.2	
				210	0.4	0.6	240	0.6	0.8	290	0.6	1.0	
	Ductile Cast Iron	≤450MPa	VP15TF	120 (80-160)	140	0.7	0.8	160	0.8	1.0	170	0.8	1.2
					180	0.5	0.6	210	0.6	0.8	230	0.6	1.0
					210	0.3	0.4	240	0.4	0.6	290	0.4	0.8
H Hardened Steel	40-55HRC	VP15TF	70 (50-90)	140	0.5	0.5	160	0.5	0.6	170	0.5	0.8	
				180	0.4	0.3	210	0.4	0.4	230	0.4	0.6	
				210	0.3	0.2	240	0.3	0.2	290	0.3	0.4	

① Overhang Length

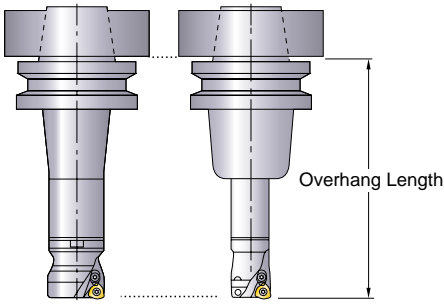

② Main Spindle Revolution

$$n(\text{min}^{-1}) = (\text{Recommended Cutting Speed} \times 1000) \div (\text{Outer Tool Diameter} \times 3.14)$$

③ Table Feed Rate

$$vf(\text{mm/min}) = n \times \text{Feed per Tooth} \times \text{Number of Teeth}$$

- ④ Recommended width of cut (ae) is more than 60% of the cutting edge diameter.
- ⑤ The above cutting conditions are guides to cutting on a #50 BT machine. In case of #40 BT and #63 HSK machines, a cutting edge diameter of under 35mm is recommended. In this case, reduce the depth of cut and table feed rate.
- ⑥ Use of **ST** chipbreaker with tougher cutting edges is recommended for machining parts that require interrupted cutting. First recommended insert grade for non-standard 06/08/09 **ST** chipbreakers is **VP30RT** irrespective of the workpiece material.
- ⑦ Cutter body with coarse pitch is recommended for the unstable cutting caused by the long tool overhang.
- ⑧ Use the "sharp" **JM** chipbreaker to lower cutting forces or when long tool overhangs are used.
- ⑨ Heavy chips are generated when machining with the **AJX**. To avoid chip jamming-related problems, use air blow while machining to discharging chips effectively.

φ 30 - 35			φ 40 (φ 32 Shank)			φ 40 (φ 42 Shank)			φ 50/φ 63 (Shank type)			φ 50/φ 63 (Arbor type)			φ 80 - 160 (Arbor type)		
Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)	Overhang (mm)	Axial Depth of Cut (mm)	Feed per Tooth (mm/tooth)
180	1.2	1.2	180	1.2	1.2	180	1.2	1.3	180	1.4	1.3	150	1.5	1.3	170	1.5	1.3
230	1.0	1.0	240	1.0	1.0	240	1.0	1.1	240	1.2	1.1	250	1.3	1.1	300	1.3	1.1
290	0.8	0.8	300	0.8	0.8	300	0.8	0.9	—	—	—	350	1.1	0.9	450	1.0	0.8
180	1.2	1.2	180	1.2	1.2	180	1.2	1.3	180	1.4	1.3	150	1.5	1.3	170	1.5	1.3
230	1.0	1.0	240	1.0	1.0	240	1.0	1.1	240	1.2	1.1	250	1.3	1.1	300	1.3	1.1
290	0.8	0.8	300	0.8	0.8	300	0.8	0.9	—	—	—	350	1.1	0.9	450	1.0	0.8
180	1.2	1.6	180	1.2	1.6	180	1.2	1.7	180	1.4	1.7	150	1.5	1.7	170	1.5	1.7
230	1.0	1.4	240	1.0	1.4	240	1.0	1.5	240	1.2	1.5	250	1.3	1.5	300	1.3	1.5
290	0.8	1.2	300	0.8	1.2	300	0.8	1.3	—	—	—	350	1.1	1.3	450	1.0	1.2
180	1.0	1.4	180	1.0	1.4	180	1.0	1.5	180	1.2	1.5	150	1.3	1.5	170	1.3	1.5
230	0.8	1.2	240	0.8	1.2	240	0.8	1.3	240	1.0	1.3	250	1.1	1.3	300	1.1	1.3
290	0.6	1.0	300	0.6	1.0	300	0.6	1.1	—	—	—	350	0.9	1.1	450	0.8	1.0
180	0.6	1.0	180	0.6	1.0	180	0.6	1.1	180	0.8	1.1	150	0.9	1.1	170	0.9	1.1
230	0.5	0.8	240	0.5	0.8	240	0.5	0.9	240	0.6	0.9	250	0.7	0.9	300	0.7	0.9
290	0.4	0.6	300	0.4	0.6	300	0.4	0.7	—	—	—						